# **GERARD ELEGANTA** INSTALLATION MANUAL

0



### **GERARD ELEGANTA**



Length of Tile	Length of Cover	Width of Cover	Minimum Pitch
1305 mm	1260 mm	320 mm	15° / 27%

#### STORAGE

If stored outside, it should be kept in a sheltered place and a well-sealed waterproof cover must be placed over the ELEGANTA roofing tiles and accessories to keep them dry and prevent damage.

#### NON-STANDARD ELEMENTS

When installing non-standard elements or gutters above the level of the roof, it is strongly recommended that materials that could cause corrosion (e.g. Cu, stainless steel...) are NOT used.

#### **ROOF TRAFFIC**

When moving around the roof, avoid buckling the tiles by placing weight on the balls of the feet, directly over the batten, in the pans of tiles.

#### **CUTTING WITH A SAW**

When cutting tiles with a metal cutting saw (which has been approved by the producer), special (tipped) metal cutting blades should be used. Cutting should be performed with the coated surface facing downwards to reduce the amount of swarf adhering to the coating. Failure to do so will result in rust stains on the tile surface.

#### WET SURFACE

For safety reasons is not recommended to walk or work on the roof when it is wet.

#### BATTENS

The recommended counter batten dimension is  $50 \times 80$  mm. The minimum counter batten height is 25 mm.

Tile batten size is 40 x 50 mm (distance between rafters less then 900 mm). For slopes above 30°, an intermediate batten is recommended, but is not obligatory.

#### LOCAL STANDARDS


It is strongly recommended that local building standards and regulations are always followed and fully complied with.

#### HANDLING


Care should be taken when handling the tiles to avoid damage to the surface. If minor damage does occur, the finishing kit should be used to repair it.






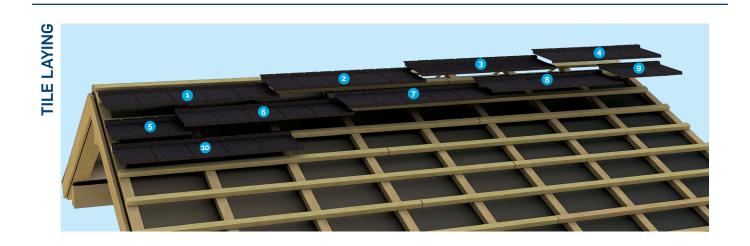









# INTERMEDIATE BATTEN INT





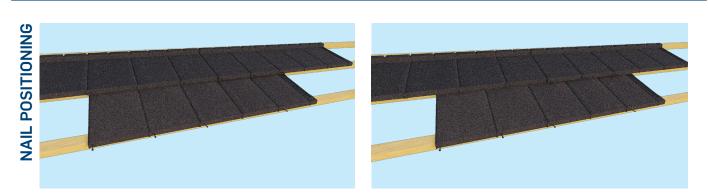




# **INSTALLATION DETAILS**

**EAVES FLASHING** 






- 02 Ventilation Space Batten 03 08
- Eaves Guard Flashing 13
- Underlay


01









**GABLE** (SCRIBED BOX BARGE)

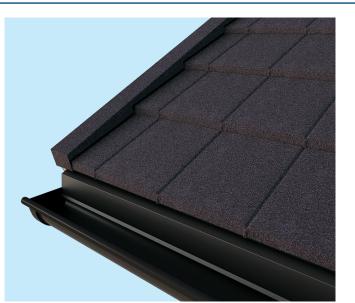




- 01 Tile Batten 02
- Ventilation Space Batten
- 03 08 Underlay
- Rafter 09
- Ventilation Space 14 15 Scribed Box Barge
- Barge Board 17


**HIP** (SPACERS)





Ridge Cover 

- - Ventilation Space
- Hip Batten

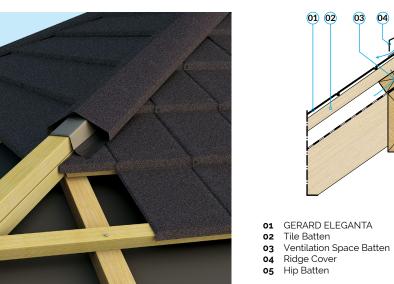

- - Ventilation Space
- 14

- Rafter

- GERARD ELEGANTA
- Tile Batten Ventilation Space Batten
- Underlay
- Rafter
- Ventilation Space
- Warmth Insulation Scribed Side Wall Flashing
- Sealant



**HIP** (RIDGE ROLL)

# WALL FLASHING




**⊜**GERARD

# **INSTALLATION DETAILS**

VALLEY





- GERARD ELEGANTA 01
- Tile Batten Ventilation Space Batten 02
- 03
- 08 Underlay Rafter 09
- Valley 10
- 14
- Ventilation Space Support Board 27





GERARD ELEGANTA 01

- Tile Batten 02
- Ventilation Space Batten Underlay Rafter 03 08
- 09 28
- Railler Support Board Roof Window Flashing Roof Window Support Batten 33
- 35 36

# ACCESSORIES



**RIDGE COVER 130** Length of cover: 1250 mm



END CAP RIDGE COVER 130



RIDGE COVER 180 Length of cover: 1250 mm



Y-HIP 30-45 RIDGE COVER 130



SCRIBED BOX BARGE 320 (LEFT) Length of cover: 1284 mm



SCRIBED SIDE WALL FLASHING 320 (LEFT) Length of cover: 1284 mm



SCRIBED BOX BARGE 320 (RIGHT) Length of cover: 1284 mm

Y-HIP 15-30 RIDGE COVER 130



SCRIBED SIDE WALL FLASHING 320 (RIGHT) Length of cover: 1284 mm



EAVES FLASHING 1350 Length of cover: 1250 mm



FLAT SHEET 450/2000 Length of cover: 1284 mm



**GERARD** 

NAILS ON A REEL 200 pcs/coil (2,8 x 50 mm)



**SANITARY VENT G15-45** Pipe cross-section: 150 x 150 mm



**COWL VENT G2** Free ventilation area: 75 cm<sup>2</sup>

# STANDARD COLOURS





info@pd.by www.pd.by Официальный партнер GERARD® • М8 Прави∧ьный дом г.Минск, ул. Брикета, 27 тел.: +375 17 311 09 06 моб.: +375 29 313 88 88 +375 33 313 88 88